




**PENTEK**  
FILTRATION

# GAC SERIES

## GAC-Series Granular Activated Carbon Cartridges

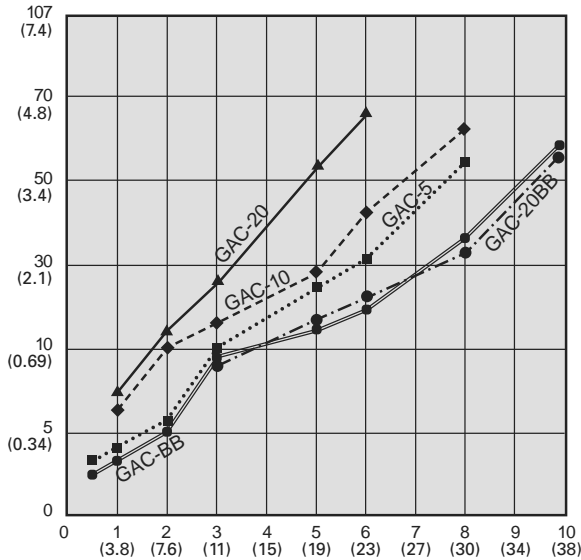

The GAC-10 and GAC-20BB are Tested and Certified by NSF International to NSF/ANSI Standard 42 for material requirements only.

### Cartridge Specifications and Performance Data

Model	Maximum Dimensions	Initial ΔP (psi) @ Flow Rate (gpm)	Chlorine Taste & Odor Reduction @ Flow Rate (gpm)*
GAC-5	2-7/8" x 4-7/8" (73 mm x 124 mm)	3.0 psi @ 0.5 gpm (0.2 bar @ 1.9 L/min)	250 gallons @ 0.5 gpm (900 liters @ 1.9 L/min)
GAC-10	2-7/8" x 9-3/4" (73 mm x 248 mm)	7.0 psi @ 1.0 gpm (0.5 bar @ 3.8 L/min)	5,000 gallons @ 1.0 gpm (18,900 liters @ 3.8 L/min)
GAC-20	2-7/8" x 20" (73 mm x 508 mm)	16 psi @ 2.0 gpm (1.1 bar @ 7.6 L/min)	10,000 gallons @ 2.0 gpm (37,800 liters @ 7.6 L/min)
GAC-BB	4-1/2" x 9-3/4" (114 mm x 248 mm)	6.0 psi @ 2.0 gpm (0.4 bar @ 7.6 L/min)	12,500 gallons @ 2.0 gpm (47,000 liters @ 7.6 L/min)
GAC-20BB	4-1/2" x 20" (114 mm x 508 mm)	5.00 psi @ 4.0 gpm (0.3 bar @ 15 L/min)	25,000 gallons @ 4.0 gpm (95,000 liters @ 15 L/min)

\* Based on manufacturer's internal testing.

### Materials of Construction

- |                |                           |                      |                   |
|----------------|---------------------------|----------------------|-------------------|
| • Filter Media | Granular-Activated Carbon | • Expansion Pad      | Polypropylene     |
| • End Caps     | Polystyrene               | • Gasket             | Buna-N top        |
| • Post-filter  | Spun Polypropylene        |                      | Santoprene bottom |
| • Outer Casing | Polystyrene               | • Temperature Rating | F to F C to C     |

WARNING: Do not use this water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the

NOTE: A drinking water cartridge may contain carbon fines or fine black powder. After installation and before using the water for

NOTE: It is recommended that you flush for 30 seconds prior to using the water for drinking or cooking purposes.

NOTE: Chlorine Reduction is estimated capacity using ppm free available chlorine (FAC) at continuous flow with greater than 20



**PENTEK**  
FILTRATION

system  
follow the instructions for flushing the

tion